
3 GHz Nickel Plated F-Type Female-to-Female Module

PRODUCT SPECIFICATION

Package includes:

A. 3 GHz Nickel Plated F-Type Module, 1 pc

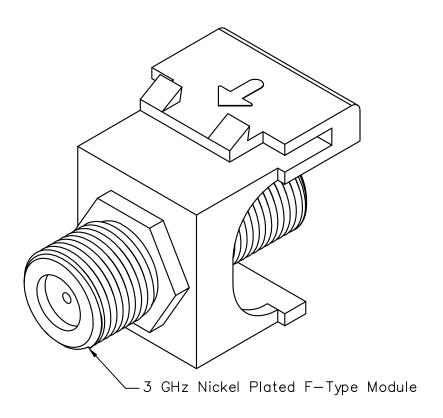


Features and Benefits:


- Designed with 3 GHz bandwidth for audio and video applications
- Rear threaded F-Type connectors for secure in-wall connections with both RG6 and RG59 coxial cables
- Provides a clean and neat appearance installation
- Compatible with all IC107 faceplates, inserts, surface mount boxes, and blank patch panels
- Compatible with all IC108 furniture faceplates, bezels, and surface mount boxes
- Available in almond, black, ivory, and white
- ANSI/TIA-568-C and UL 1863 compliant


MODULE, F-TYPE, NICKEL PLATED, 3 GHZ				
ITEM NO.	IC107B9FXX	REV. C	Premium I	
DWG NO.	PS107B9F00	PAGE NO. 1		




CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr., Suite D., Fullerton, CA 92831 * www.icc.com







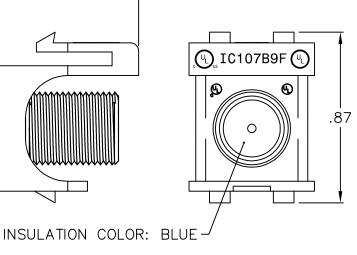

NOTE: UNLESS OTHERWISE SPECIFIED

- 1. HOUSING:
 - A. MATERIAL: ABS, UL 94V-0
 - B. COLOR: XX: AL-ALMOND, BK-BLACK, IV-IVORY, & WH-WHITE
- 2. NICKEL PLATED F-TYPE CONNECTOR:
 - A. MATERIAL: BRONZE WITH NICKEL PLATING
 - B. HOLDING FORCE > 80 GRAMS
 - C. F-TYPE CONNECTOR THREADS: 3/8-32 UNEF-2A
- 3. ELECTRICAL:
 - A. RETURN LOSS OF -20 dB MAX
 - B. FREQUENCY RANGE 1.4 ~ 3.0 GHZ
 - C. CONTACT RESISTANCE < 10 MOHM
 - D. CHARACTER IMPEDANCE RATED 75 OHM
 - E. INSULATION RESISTANCE > 10 MOHM

CUL)US FILE NO. 125268

MODULE, F-TYPE, NICKEL PLATED, 3 GHZ				
	ITEM NO.	IC107B9FXX	REV. C	E
	DWG NO.	PS107B9F00	PAGE NO. 2	



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 * www.icc.com